


FIN Oak

Engineered Hardwood Flooring

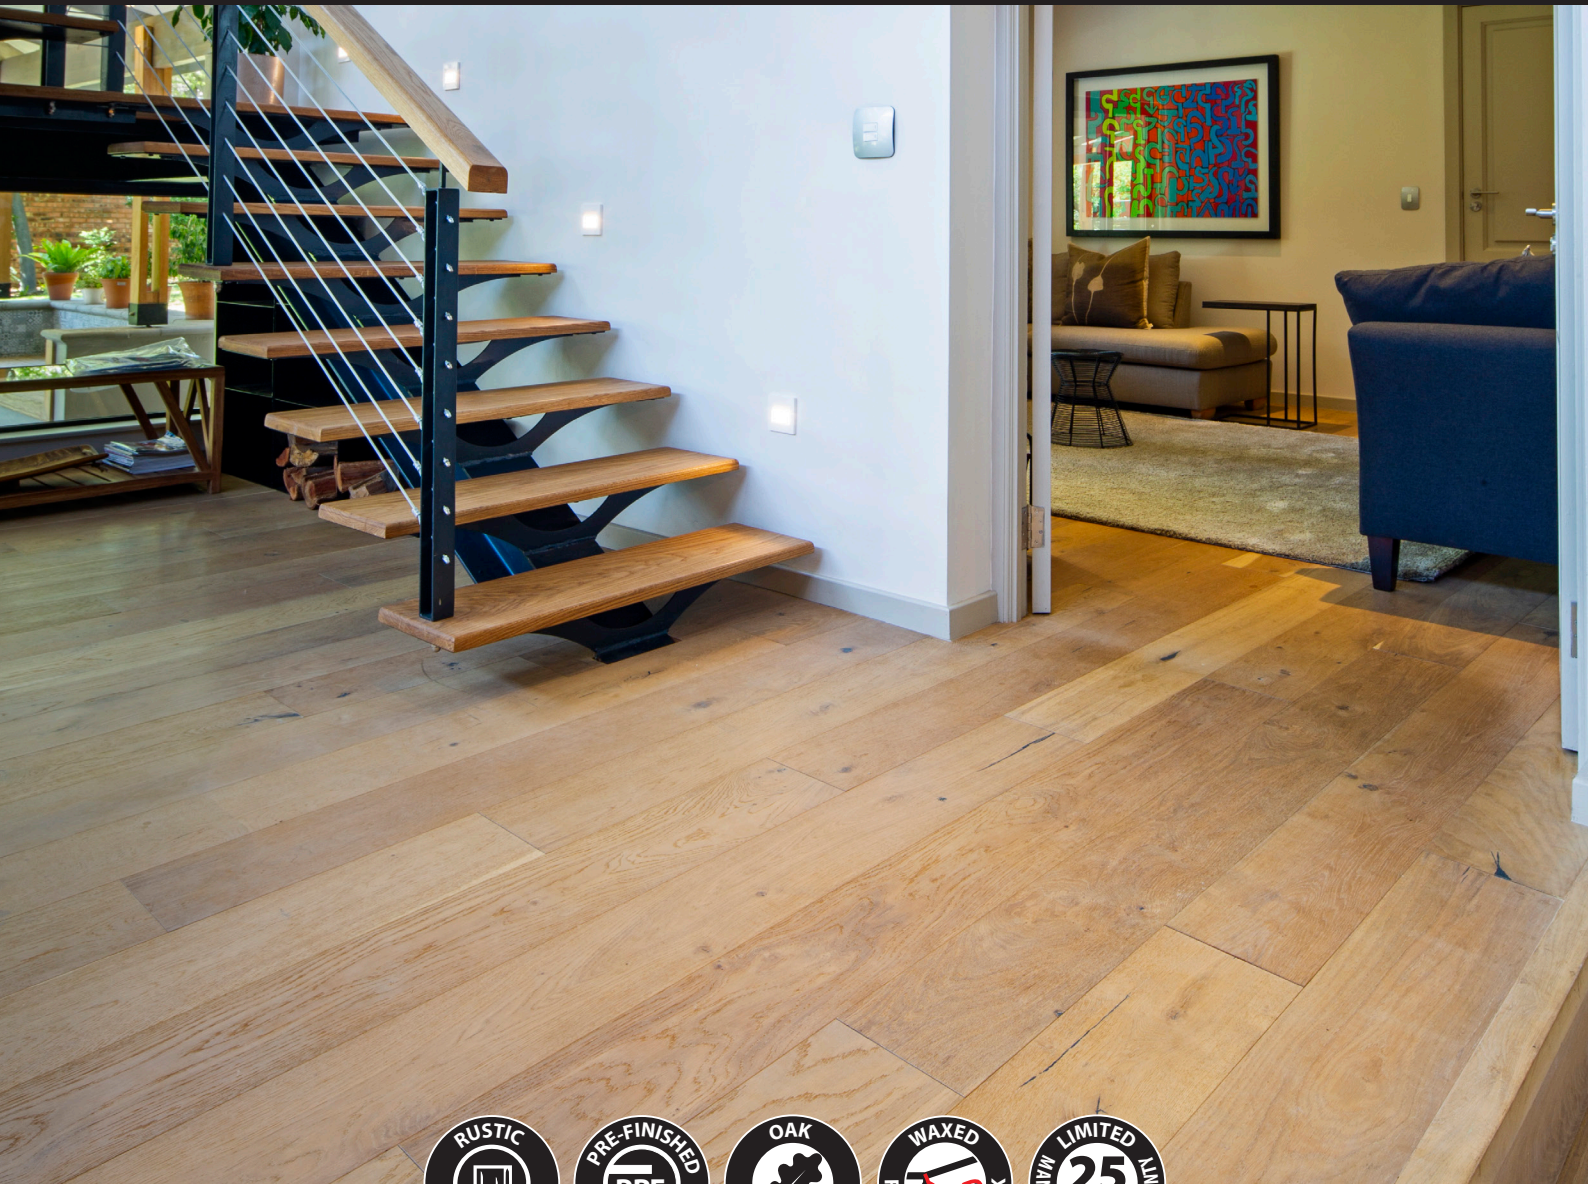

Finoak 15/4mm PRE-FINISHED

Plank dimensions : 1900 x 190 x 15/4mm (2.888m² per box)


by
FINfloor™
www.finfloor.co.za

FIN Oak

Engineered Hardwood Flooring

FINOAK 15/4mm PRE FINISHED		
Length	1900 mm	
Width	190 mm	
Thickness	15 mm	
Top surface	4 mm	
Tolerance	Length	+/- 1.0 mm
	Width	+/- 0.2 mm
	Thickness	+/- 0.2 mm
	Gap	≤ 0.20 mm
	Height difference	≤ 0.15 mm
	Cup warping concave	≤ 0.15%
	Cup warping convex	≤ 0.2%
	Bow warping concave	≤ 0.2%
Bow warping convex	≤ 0.4%	

Pre-Finished

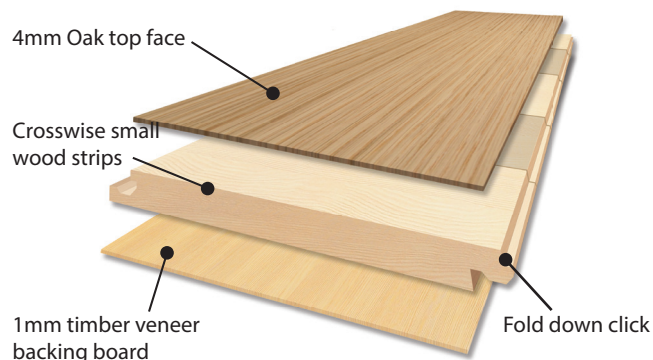

Finished with



FINOAK 15/4 PRE FINISHED TECHNICAL SPECS	
General Construction	3 ply layer
Timber Specification	Oak
Grade	Rustic
Core & Back	Poplar
Face Finish / Colour	Cederberg - Invisible UV lacquered (LOBA), light brushed finish
	Maluti - White washed, UV lacquered (KLUMP), light brushed finish
	Outeniqua - White stained, UV lacquered (KLUMP), light brushed finish.
Locking System	Waxed fold down click system

LAB TEST to STANDARDS			
Test	Standard reference	Requirement	Test Data
Moisture Content	EN 13183-1	7±2%	8,40%
Width - permit.deviation	EN13647	±0.2 mm	0.2 mm
Reaction to fire	EN13501-1		Dfl-S1
Release of formaldehyde	EN717-1	≤0.124 mg/m ³	≤0.008 mg/m ³
Emission of pentachlorophenol	CEN/TR 14823	≤5 ppm	≤5 ppm

Accuracy of colour and wood characteristics: whilst we have made every effort to ensure the colours and wood characteristics displayed on our website are as accurate as possible these images may vary from the actual product.

Rustic grade comes with: An unlimited number of knots (up to 50mm). Fallen knots are filled with beige/oak filler. Small hollows are acceptable. Exposed central core is allowed. Oak grain pattern is heavily exposed which will/could cause colour unevenness.

